

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 101 533 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
23.05.2001 Bulletin 2001/21

(51) Int Cl.7: B03C 3/12, B03C 3/41

(21) Application number: 00124900.2

(22) Date of filing: 15.11.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Endo, Kiyomu
Tokyo (JP)

(74) Representative: Sutto, Luca
Bugnion S.p.A.
Viale Lancetti 17
20158 Milano (IT)


(30) Priority: 15.11.1999 JP 32471799

(71) Applicant: O-DEN Corporation
Tokyo (JP)

(54) Electrostatic dust precipitator

(57) An electric dust collecting unit disclosed herein includes a corona discharging portion (8) for giving rise to corona discharge to electrically charge cigarette smoke particulates, toner, and other floating particulates in air, an electric collecting portion (9) disposed on a leeward side of this corona discharging portion (8), for electrically collecting the floating particulates charged at the corona discharging portion (8), and a box-type frame (10) with its opposite surfaces opened, in such a configuration that the corona discharging portion (8) has a plurality of needle electrodes (8a) which is disposed in such a way that their respective needle tips may be directed toward the leeward side (that is, with their backs directed toward a front face opening in the box-type frame (10)).

FIG.1

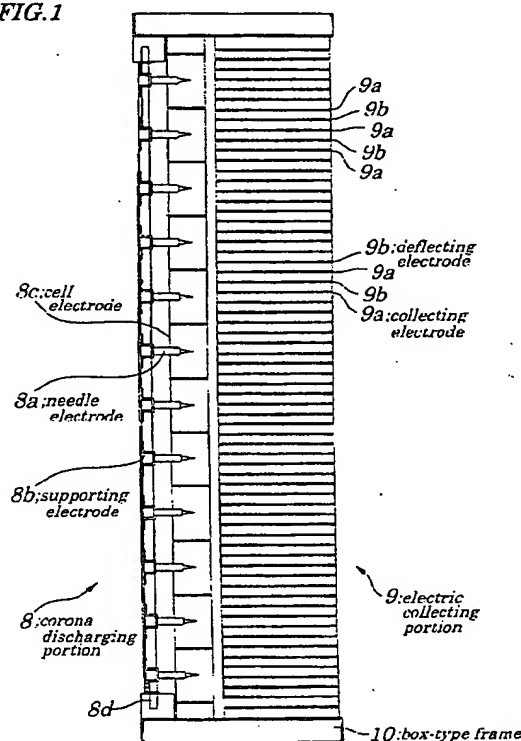

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The invention relates to an electric dust collecting unit and, more particularly to, the electric dust collecting unit suitable for use in a diesel engine exhausted carbon particulate removing apparatus, a factory oil mist removing apparatus or a like.

[0002] The present application claims priority of Japanese Patent Application No. Heill-324717 filed on November 15, 1999, which is hereby incorporated by reference.

Description of the Related Art

[0003] Since offices, restaurants, amusement places, factories, housing, and other buildings have recently been of an airtight construction, cigarette smoke, toner, welding fumes, and other harmful particulates floating in air are more likely to damage human health in a building, contaminated facilities and equipment. To guard against this, there has been widely employed an air cleaner which is placed in the office or housing, to collect cigarette smoke, particulates, and offensive odors floating in the air. One such type of air cleaner is known as a needle-discharge type air cleaner disclosed in Japanese Patent Application Laid-open No. Hei9-285739 (Japanese Patent No. 2733908), Japanese Patent Application No. Hei11-125451, and others. This air cleaner roughly has such a configuration that, as shown in Fig. 8, its apparatus box body 3, having an air inlet 1 and an air outlet 2, includes a panel-shaped pre-filter 4, a box-shaped electric dust collecting unit 5, a panel-shaped deodorizing filter 6 made up of an activated carbon filter, and a ventilating fan 7, which are all mounted serially from a windward side to a leeward side therein.

[0004] In the above-mentioned configuration, when the ventilating fan 7 operates, air in a room is drawn in. If, in this case, the air in the room has been contaminated with cigarette smoke or other floating particulates, first the panel-shaped pre-filter 4 captures relatively large particulates, to permit other relatively small particulates that could not be captured by the panel-shaped pre-filter 4 to be captured and removed by the box-shaped electric dust collecting unit 5. Still remaining cigarette odor is absorbed and removed by the panel-shaped deodorizing filter 6. In this manner, cleaned air is returned to the room via the air outlet 2 by exhausting force of the ventilating fan 7. The boxed-shaped dust collecting unit 5 or a like, if contaminated with particulates or a like stuck thereto, may be taken out from the apparatus box body 3, washed, rehabilitated, and then mounted in the apparatus box body 3 again for use.

[0005] As shown in Figs. 9 and 10, the boxed-shaped electric dust collecting unit 5 has a box-type frame 5a

which includes a plurality of disk-needle-shaped needle electrodes 5b, prism-shaped deflecting electrodes 5c for supporting and fixing these disk-needle-shaped needle electrodes 5b in a protruded state, and both-ends-opened rectangular-shaped collector cells (collecting electrodes) (hereinafter may be referred to as collector cells 5d) for surrounding these disk-needle-shaped needle electrodes 5b and prism-shaped deflecting electrodes 5c in a non-contact manner which are all arrayed in a lattice and in combination in such a manner that there may be provided an air-passage gap between each of the prism-shaped deflecting electrodes 5c and its corresponding collector cell 5d.

[0006] When, in this configuration, a DC voltage of for example 5-6V is applied between a disk-needle-shaped needle electrode 5b and its corresponding prism-shaped deflecting electrode 5c, which are both positive in potential, and its corresponding negative-potential electrode collector cell 5d, uniform corona discharge persistently occurs in a stable manner around the sharp tip of a disk-needle-shaped needle electrode 5b, thus forming an ionized space region 5e as shown in Fig. 11. When, in this state, the ventilating fan 7 operates to permit contaminated air inhaled via the air inlet 1 (Fig 8) to reach the ionized space region 5e of the box-shaped dust collecting unit 5, oxygen is first dissociated into positive ions, which in turn stick to particulates p of cigarette smoke or a like, and charge them electrically. The charged particulates "p" pass through between a next prism-shaped deflecting electrode 5c and its corresponding collector cell 5d, during which they are attracted to the collector cell 5d with a negative (lower) potential if they are near that collector cell 5d. If they are far away from a electrode plate(not shown or labeled) of the collector cell 5d, on an other hand, the particulates "p" are near the electrode plate (not shown or labeled) of the prism-shaped deflecting electrode 5c with a positive (higher) potential, so that they get Coulomb resiliency to move toward the electrode plate (not shown or labeled) of the collector cell 5d, thus finally being attracted and captured by the collector cell 5d.

[0007] In the above-mentioned prior art box-shaped electric dust collecting unit 5, however, as shown in Figs. 9 and 10, the sharp tip of the disk-needle-shaped needle electrode 5b faces to an opened front face of the box-type frame 5a, therefore an operator may be injured by the needle electrodes when washing, maintaining or inspecting the boxed shaped electric dust collecting unit 5, thus holding a manufacturer responsible for handling safety.

SUMMARY OF THE INVENTION

[0008] In view of the above, it is an object of the invention to provide an electric dust collecting unit capable of safe replacement, washing, and maintenance and inspection.

[0009] According to a first aspect of the present inven-

tion, there is provided an electric dust collecting unit including:

a corona discharging portion for giving rise to corona discharge to thereby electrically charge floating particulates in an airflow; and
an electric collecting portion disposed on a leeward side of the corona discharging portion, for electrically collecting the floating particulates charged at the corona discharging portion,

wherein the corona discharging portion includes a plurality of needle electrodes in which each has a sharp needle tip and also which is arranged in such a way that the sharp needle tip thereof may be directed toward the leeward side.

[0010] In the foregoing, a preferable mode is one wherein the corona discharging portion and the electric collecting portion are disposed as separated from each other space-wise with or without an insulating material interposed therebetween.

[0011] Also, a preferable mode is one wherein the corona discharging portion includes:

the plurality of the needle electrodes which each has the sharp needle tip and also which is arranged in such the way that the sharp needle tip thereof may be directed toward the leeward side; and
a plurality of opposing electrodes which is disposed in an n-to-one opposing relationship with the needle electrodes, where the n is a two or larger natural number representing number of the needle electrodes, and also which each has both ends thereof opened for forming an airflow passage.

[0012] Also, a preferable mode is one wherein the corona discharging portion includes:

the plurality of the needle electrodes which each has the sharp needle and also which is arrayed in such the way that the sharp needle tip thereof may be directed toward the leeward side; and
a plurality of cell-shaped opposing electrodes which is disposed in a one-to-one opposing relationship with the sharp needle electrodes and also which each has both ends thereof opened for forming an airflow passage.

[0013] Also, a preferable mode is one wherein the corona discharging portion includes:

the plurality of the needle electrodes which each has the sharp needle tip and also which is disposed in such the way that the sharp needle tip thereof may be directed toward the leeward side;
one or more of supporting electrodes for supporting and fixing the plurality of the needle electrodes; and
the plurality of the cell-shaped opposing electrodes

which is disposed on a leeward side of the one or more supporting electrodes in the one-to-one opposing relationship with the needle electrodes and also which has the both ends thereof opened for forming the airflow passage.

[0014] Also, a preferable mode is one wherein each the needle electrodes are supported by the supporting electrodes with at least the sharp needle tip thereof as driven into an internal cavity of the cell-shaped opposing electrodes.

[0015] Also, a preferable mode is one wherein the one or more supporting electrodes are made of a rod-shaped member or an elongated member and has thereon the plurality of the needle electrodes supported and fixed in a row with a predetermined spacing therebetween.

[0016] Also, a preferable mode is one wherein the rod-shaped member or the elongated member of the one or more supporting electrode has a plurality of mounting holes made therein in a row with a predetermined spacing therebetween, each of which has corresponding one of the needle electrodes supported and fixed, as fitted therein.

[0017] Also, a preferable mode is one wherein the electric collecting portion includes:

a collecting electrode for electrostatically attracting and collecting floating particulates charged by the needle electrodes; and
a deflecting electrode provided correspondingly to the collecting electrode, for providing the floating particulates which are charged, with deflecting force toward the collecting electrode.

[0018] Also, a preferable mode is one wherein the electric collecting portion has thereon the collecting electrode which is plate-shaped and the deflecting electrode which is plate-shaped as disposed in parallel with each other with a predetermined mounting spacing therebetween.

[0019] Also, a preferable mode is one wherein the opposing electrodes are made up of paper or synthetic resin coated with metal.

[0020] Also, a preferable mode is one wherein the opposing electrodes are made up of a stack of paper or synthetic resin and metal foil.

[0021] wherein the cell-shaped opposing electrodes are made up of paper or synthetic resin coated with metal.

[0022] Also, a preferable mode is one wherein the cell-shaped opposing electrodes are made up of a stack of paper or synthetic resin and metal foil.

[0023] Also, a preferable mode is one wherein at least one of the collecting electrode and the deflecting electrode is made up of paper or synthetic resin coated with metal.

[0024] Furthermore, a preferable mode is one where-

in at least one of the collecting electrode and the deflecting electrode is made up of a stack of paper or synthetic resin and metal foil.

[0025] According to a second aspect of the present invention, there is provided an electric dust collecting unit including:

a corona discharging portion for giving rise to corona discharge to charge floating particulates in an airflow; and

an electric collecting portion disposed on a leeward side of the corona discharging portion, for electrically collecting the floating particulates charged by the corona discharging portion, wherein:

the corona discharging portion includes a plurality of needle electrodes which each has a sharp needle tip and also which is disposed in such a way that the sharp needle tip thereof may be directed toward a leeward side, a plurality of rod-shaped or elongated supporting electrodes separately disposed from each other with a predetermined spacing therebetween, for supporting and fixing the plurality of the needle electrodes, and a plurality of cell-shaped opposing electrodes which is disposed on a leeward side of the plurality of rod-shaped or elongated supporting electrodes in a one-to-one opposing relationship with the needle electrodes and also which each has both ends thereof opened for forming airflow passage;

the electric collecting portion includes a plate-shaped collecting electrode for electrostatically attracting and collecting the floating particulates charged by the needle electrodes and a plate-shaped deflecting electrode provided correspondingly to the plate-shaped collecting electrode, for giving the floating particulates which are charged, deflecting force toward the plate-shaped collecting electrode, in such a configuration that the plate-shaped collecting electrode and the plate-shaped deflecting electrode are alternately disposed in parallel with each other with a predetermined spacing therebetween; and

a mounting spacing between the plate-shaped collecting electrode and the plate-shaped deflecting electrode is set shorter than a mounting spacing between the plurality of rod-shaped or elongated supporting electrodes.

[0026] With the above configuration, the needle tip of each needle electrode is disposed and provided as directed toward the leeward side, in other words, with its back directed toward the front face opening in the electric dust collecting unit, so that the worker or the operator can be prevented from being injured his fingers or body by the needle tip, thus resulting in safe replacement, washing, and maintenance and inspection of the electric dust collecting unit. Therefore, the electric dust collecting unit of this embodiment is applicable not only to an

office-use air cleaner but also to a home-use air cleaner.

[0027] In addition, since the prior art prism-shaped deflecting electrode is not used, airflow passage is not pressured, to thereby reduce pressure loss remarkably, thus contributing to miniaturization of the electric dust collecting unit, hence an air cleaner.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] The above and other objects, advantages and features of the present invention will be more apparent from the following description taken in conjunction with accompanying drawings in which:

- Fig. 1 is a vertical sectional view showing a rough configuration of an electric dust collecting unit according to an embodiment of the present invention;
- Fig. 2 is a horizontal sectional view showing the rough configuration of the electric dust collecting unit of Fig. 1;
- Fig. 3 is a front view (front elevation) showing the rough configuration of the electric dust collecting unit of Fig. 1;
- Fig. 4 is rear view (rear elevation) showing the rough configuration of the electric dust collecting unit of Fig. 1;
- Figs. 5A and 5B are flow diagrams explaining, along steps, how to attach needle electrodes of the electric dust collecting unit of Fig. 1;
- Fig. 6 explains operations of the electric dust collecting unit of Fig. 1 when it is attached to an air cleaner;
- Fig. 7 is vertical sectional view showing a configuration of a variant according to the embodiment of Fig. 1;
- Fig. 8 is a schematic sectional view showing a rough configuration of a prior art air cleaner;
- Fig. 9 is a cross-sectional view showing a configuration of a prior art needle discharge-type electric dust collecting unit;
- Fig. 10 is an expanded perspective view showing an important part of the prior art needle discharge-type electric dust collecting unit of Fig. 9; and
- Fig. 11 explains operations of the prior art needle discharge-type electric dust collecting unit of Fig. 9.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Best modes of carrying out the present invention will be described in further detail using an embodiment with reference to the accompanying drawings.

[0030] First, overall configuration of an electric dust collecting unit is described as follows.

[0031] As shown in Figs. 1 and 2, the electric dust collecting unit according to this embodiment is comprised of a corona discharging portion 8 for giving rise to corona discharge to charge cigarette smoke particulates, toner,

and other kinds of floating particulates floating in air, an electric collecting portion 9 disposed on a leeward side of this corona discharging portion 8, for electrically collecting the floating particulates charged at the corona discharging portion 8, and a box-type frame 10 with its front and rear faces opened, in such a configuration that the corona discharging portion 8 and the electric collecting portion 9 are housed in the box-type frame 10 and separated from each other by about 2-8mm with no insulating material therebetween.

[0032] Next, the corona discharging portion 8 is described in detail.

[0033] As shown in Figs. 1 and 2, the above-mentioned corona discharging portion 8 is comprised of a plurality of (12 x 12 in this case) needle electrodes 8a with their sharp needle tips arrayed vertically and horizontally toward the leeward side, a plurality of (12 in this case) rod-shaped supporting electrodes, supporting electrodes 8b, for supporting and fixing each row (12 vertically in this case) of the plurality of needle electrodes 8a with a predetermined spacing therebetween, and a plurality of (12 x 12 in this case) cell-shaped opposing electrodes (hereinafter referred to as cell electrodes 8c) which has each of their both ends opened for providing an air passage and which is disposed on the leeward side of these supporting electrodes 8b in a one-to-one opposing relationship with these needle electrodes 8a.

[0034] As shown in Fig. 5A and Fig. 5B, the needle electrodes 8a each is made up of a stainless-steel sharp needle tip, needle tip 81, plated with nickel (oxidation preventing treatment), a large-diameter cylindrical body portion, body portion 82, for supporting the needle tip 81, and a small-diameter cylindrical root portion 83 (having a step at a rear end portion), in such a manner that with the needle tip 81 as driven into its corresponding cell electrode 8c as deep as 2-12mm as necessary, its root portion 83 is fixed by corresponding supporting electrode 8b. Note here that the needle electrode 8a according to this embodiment measures 5-20mm in total length as necessary.

[0035] The above-mentioned supporting electrodes 8b, on an other hand, each have a U-shaped portion formed by folding an elongated metal plate flat plate into a cross-sectional U shape in section, as shown in Fig. 1, opposite sides of which are further folded back into respective flange portions. The supporting electrodes 8b have a plurality of (12 in this embodiment) mounting holes "h" made therein beforehand in a row with a predetermined spacing therebetween, which mounting holes "h" have a diameter a little larger than that of the root portion 83 of the needle electrode 8a and also into each of which mounting holes "h" is fit the needle electrode 8a to be supported and fixed thereto by use of caulking technologies. Note here that these mounting holes "h" are preferably made with a spacing of 10-30mm therebetween and, more preferably, 15-25mm from a viewpoint of dust collecting efficiency.

[0036] In this embodiment, to fix the needle electrode 8a to the supporting electrode 8b, first, as shown in Fig. 5A, the root portion 83 of the needle electrode 8a is inserted into the mounting hole "h" in the supporting electrode 8b and held there using a jig not shown. Next, as shown in Fig. 5B, an eccentric caulking tool Ma provided at a tip of a rotary shaft of a high-speed eccentric rotary caulking machine M is eccentrically rotated at a high speed as pressed against the root portion 83 of the needle electrode 8a which is protruded out upward from the mounting hole "h". As a result of this rotation, large eccentric force acts on the root portion 83 of the needle electrode 8a to caulk that root portion 83. After that, as shown on the left half of Fig. 5B, the root portion 83 is plastic-deformed (83') in a radial direction and integrated with the supporting electrode 8b solidly.

[0037] In a side portion of each of the opposite ends of each supporting electrode 8b is made a through-hole (not labeled) through which passes a coupling metal rod described later. In this embodiment, as shown in Fig. 3, twelve supporting electrodes 8b supporting the needle electrodes 8a are arrayed in parallel with each other with the predetermined spacing therebetween and spitted at their opposite ends by two coupling metal rods 8d, to be mutually coupled both mechanically and electrically.

[0038] Also, the cell electrodes 8c are formed into both-ends-opened square cells (cells measuring about 10-20mm in depth for housing the needle tip 81 of the needle electrode 8a) by assembling vertically and horizontally a number of electrode flat plates measuring about 10-20mm in width, into a one-to-one opposing relationship of electrodes arrayed in a lattice as a whole. Note here that each side of the cell electrode 8c is preferably 10-30mm and, more preferably, 15-25mm from a viewpoint of dust collecting efficiency.

[0039] Next, the electric collecting portion 9 is described in detail as follows.

[0040] As shown in Figs. 1 and 4, the electric collecting portion 9 has a plurality of collecting electrodes 9a each made up of a metal flat plate measuring 30-60mm in width and deflecting electrodes 9b also each made up of a metal flat plate which are alternately disposed in parallel with each other with a mounting spacing of 3-8mm therebetween in this embodiment. The collecting electrodes 9a have a function of attracting and collecting floating particulates charged by the needle electrodes 8a. The deflecting electrodes 9b have a role of providing the charged floating particulates which pass by with deflecting force toward the collecting electrodes 9a.

[0041] As can be seen from the above-mentioned sizes, in this embodiment, mounting space between the collecting electrode 9a and the deflecting electrode 9b is set at a value smaller than that between the supporting electrodes 8b.

[0042] Next, with reference to Fig. 6, operations are described of a case where an electric dust collecting unit having the above-mentioned configuration is mounted

in an air cleaner, as follows.

[0043] When the electric dust collecting unit is operating, at the corona discharging portion 8, a DC voltage of, for example, about 5kV from a high tension DC power source is applied between the needle electrodes 8a and the cell electrodes 8c in such a wiring aspect that the needle electrodes 8a may be of a positive potential and the cell electrodes 8c maybe of a negative or ground potential. Likewise, at the electric collecting portion 9, a DC voltage of, for example, about 5kV from the high tension DC power source is applied between the collecting electrodes 9a and the deflecting electrodes 9b in such a wiring aspect that the deflecting electrodes 9b may be of a positive potential and the collecting electrodes 9a may be of a negative or ground potential. Note here that voltage is applied to the needle electrodes 8a via the corresponding supporting electrodes 8b.

[0044] In this state, at the corona discharging portion 8, as shown in Fig. 6, uniform corona discharge occurs persistently in a stable manner around the needle tip 81 of each of the needle electrodes 8a, to form an ionized space region 8e. With this, when contaminated air drawn in the electric dust collecting unit by attracting force of a ventilating fan (not shown) passes through the corona discharging portion 8 (ionized space region 8e), first the oxygen having lower ionizing energy is dissociated into positive ions, which in turn stick to, for example, cigarette smoke particulates "p" to give them electric charge of a positive ion. Thus charged particulates "p" pass through a next electric collecting portion 9 (between the collecting electrodes 9a and the deflecting electrodes 9b), during which those particulates are captured to the collecting electrodes 9a at negative or ground potential if they are near these collecting electrodes 9a and, if they are far away from the electrodes plates of the collecting electrodes 9a, they get resiliency due to the positive potential of the deflecting electrodes 9b to be pushed toward the electrode plates of and captured by the collecting electrodes 9a.

[0045] Air thus cleaned is returned again to a room by an exhausting force of the ventilating fan. The electric dust collecting unit, if contaminated with particulates or a like stuck thereto, is taken out of the electric dust collecting unit apparatus box body to be cleaned, rehabilitated, and then mounted again in that electric dust collecting unit apparatus box body for use.

[0046] Thus, according to the configuration of this embodiment, the needle tips 81 of the needle electrodes 8a are disposed and provided as directed toward the leeward side, in other words, with their backs directed toward the front face opening of the electric dust collecting unit, so that the worker and the operator can be prevented from being injured their fingers by the needle tip, resulting in safe replacement, washing, and maintenance and inspection of that electric dust collecting unit. Therefore, the electric dust collecting unit of this embodiment is applicable to an air cleaner not only for use in offices but also for use in houses at large.

[0047] In addition, since it does not employ the prior art prism-shaped deflecting electrode 5c (see Figs. 9 and 10), airflow passage is not pressured, to thereby remarkably reduce pressure loss, thus contributing to miniaturization of the electric dust collecting unit, hence the air cleaner.

[0048] It is apparent that the present invention is not limited to the above embodiments but may be changed and modified without departing from the scope and spirit of the invention.

[0049] For example, size, shape, number of articles, and layout of the needle electrodes 8a, the supporting electrodes 8b, the cell electrodes 8c, the collecting electrodes 9a, and the deflecting electrodes 9b are not limited to those of the above-mentioned embodiment but may be changed as necessary.

[0050] Also, although the above-mentioned embodiment has employed such a configuration that the corona discharging portion 8 and the electric collecting portion 9 are space-wise separated from each other by about 2-8mm, this range of values is specifically disclosed only for convenience as a technological literature so it is not restrictive in the invention. Likewise, although length of each side of the cell electrode 8c is preferably 10-30mm and, more preferably, 15-25mm from the viewpoint of dust collecting efficiency, the invention is not limited to this range of values. Moreover, although the above-mentioned embodiment has set at 3-8mm the mounting spacing between the collecting electrodes 9a and the corresponding deflecting electrodes 9b, the invention is not limited to this range of values. This holds true also with other ranges.

[0051] Further, although the above-mentioned embodiment has been described in the above embodiment where the plurality of needle electrodes 8a and the plurality of cell electrodes 8c are disposed in a one-to-one opposing relationship, such other layout may be employed that, for example, one cell electrode 8f may correspond to two needle electrodes 8a. Further, n (which is a two or larger natural number representing the number of the needle electrodes) number of needle electrode 8a may correspond to one opposing electrode. A term "opposing electrode" is used here because it is more appropriate than the a "cell electrode" when n is three or larger in a one-to-n opposing relationship between the cell electrodes 8c and the needle electrodes 8a. The opposing electrode may be groove-shaped or slit-shaped.

[0052] Also, although the above-mentioned embodiment has used caulking technology as means for fixing the needle electrodes 8a to the supporting electrodes 8b, the means is not limited to that, so that silver wax or any other appropriate adhesive agents may be used or the needle electrodes 8a may be driven into mounting holes made beforehand in the supporting electrodes 8b and fit thereto.

[0053] Further also, although the above-mentioned embodiment has been described in a case where the

electric dust collecting unit of the invention is applied to an air cleaner, application is not limited to that, so that, for example, it may be applied to a diesel-engine exhausted-graphite removing apparatus, a factory oil-mist removing apparatus, or a like

[0054] Further also, the cell electrodes (opposing electrodes), the collecting electrodes, or the deflecting electrodes may be made up of, besides a metal plate, paper or synthetic resin coated with metal or a stack made up of paper or synthetic resin and metal foil. With this, the electric dust collecting unit can be reduced in weight and manufacturing costs, thus improving recyclability.

[0055] Further also, although in the above-mentioned embodiment, the supporting electrode has been formed by folding part of the elongated metal flat plate into the cross-sectional U shape, a bulk-shaped member may be used instead.

[0056] Further also, the above-mentioned embodiment has been described in a case where the corona discharging portion and the electric collecting portion are space-wise separated from each other with no insulating material therebetween, instead an insulating material may be interposed therebetween to separate them from each other space-wise.

[0057] It is thus apparent that the present invention is not limited to the above embodiments but may be changed and modified without departing from the scope and spirit of the invention.

Claims

1. An electric dust collecting unit characterized by comprising:

a corona discharging portion (8) for giving rise to corona discharge to thereby electrically charge floating particulates in an airflow; and an electric collecting portion (9) disposed on a leeward side of said corona discharging portion (8), for electrically collecting said floating particulates charged at said corona discharging portion (8),

wherein said corona discharging portion (8) includes a plurality of needle electrodes (8a) in which each has a sharp needle tip (81) and also which is arranged in such a way that said sharp needle tip (81) thereof may be directed toward said leeward side.

2. The electric dust collecting unit according to Claim 1, characterized in that said corona discharging portion (8) and said electric collecting portion (9) are disposed as separated from each other space-wise with or without an insulating material interposed therebetween.

3. The electric dust collecting unit according to Claim 1, characterized in that said corona discharging portion (8) comprises:

said plurality of said needle electrodes (8a) which each has said sharp needle tip (81) and also which is arranged in such said way that said sharp needle tip (81) thereof may be directed toward said leeward side; and a plurality of opposing electrodes (8c, 8f) which is disposed in an n-to-one opposing relationship with said needle electrodes (8a), where said n is a two or larger natural number representing number of said needle electrodes (8a), and also which each has both ends thereof opened for forming an airflow passage.

4. The electric dust collecting unit according to Claim 1, characterized in that said corona discharging portion (8) comprises:

said plurality of said needle electrodes (8a) which each has said sharp needle and also which is arrayed in such said way that said sharp needle tip (81) thereof may be directed toward said leeward side; and a plurality of cell-shaped opposing electrodes (8c, 8f) which is disposed in a one-to-one opposing relationship with said sharp needle electrodes (8a) and also which each has both ends thereof opened for forming an airflow passage.

5. The electric dust collecting unit according to Claim 4, characterized in that said corona discharging portion (8) comprises:

said plurality of said needle electrodes (8a) which each has said sharp needle tip (81) and also which is disposed in such said way that said sharp needle tip (81) thereof may be directed toward said leeward side; one or more of supporting electrodes (8b) for supporting and fixing said plurality of said needle electrodes (8a); and said plurality of said cell-shaped opposing electrodes (8c, 8f) which is disposed on a leeward side of said one or more supporting electrodes (8b) in said one-to-one opposing relationship with said needle electrodes (8a) and also which has said both ends thereof opened for forming said airflow passage.

6. The electric dust collecting unit according to Claim 5, characterized in that each said needle electrodes (8a) are supported by said supporting electrodes (8b) with at least said sharp needle tip (81) thereof as driven into an internal cavity of said cell-shaped opposing electrodes (8c, 8f).

7. The electric dust collecting unit according to Claim 5, characterized in that said one or more supporting electrodes (8b) are made of a rod-shaped member or an elongated member and has thereon said plurality of said needle electrodes (8a) supported and fixed in a row with a predetermined spacing therebetween. 5
8. The electric dust collecting unit according to Claim 7, characterized in that said rod-shaped member or said elongated member of said one or more supporting electrode has a plurality of mounting holes (h) made therein in a row with a predetermined spacing therebetween, each of which has corresponding one of said needle electrodes (8a) supported and fixed, as fitted therein. 10
9. The electric dust collecting unit according to Claim 1, characterized in that said electric collecting portion (9) comprises: 15
- a collecting electrode (9a) for electrostatically attracting and collecting floating particulates charged by said needle electrodes (8a); and
- a deflecting electrode (9b) provided correspondingly to said collecting electrode (9a), for providing said floating particulates which are charged, with deflecting force toward said collecting electrode (9a). 20
10. The electric dust collecting unit according to Claim 9, characterized in that said electric collecting portion (9) has thereon said collecting electrode (9a) which is plate-shaped and said deflecting electrode (9b) which is plate-shaped as disposed in parallel with each other with a predetermined mounting spacing therebetween. 25
11. The electric dust collecting unit according to Claim 3, characterized in that said opposing electrodes (8c, 8f) are made up of paper or synthetic resin coated with metal. 30
12. The electric dust collecting unit according to Claim 3, characterized in that said opposing electrodes (8c, 8f) are made up of a stack of paper or synthetic resin and metal foil. 35
13. The electric dust collecting unit according to Claim 4, characterized in that said cell-shaped opposing electrodes (8c, 8f) are made up of paper or synthetic resin coated with metal. 40
14. The electric dust collecting unit according to Claim 4, characterized in that said cell-shaped opposing electrodes (8c, 8f) are made up of a stack of paper or synthetic resin and metal foil. 45
15. The electric dust collecting unit according to Claim 9, characterized in that at least one of said collecting electrode (9a) and said deflecting electrode (9b) is made up of paper or synthetic resin coated with metal. 50
16. The electric dust collecting unit according to Claim 9, characterized in that at least one of said collecting electrode (9a) and said deflecting electrode (9b) is made up of a stack of paper or synthetic resin and metal foil. 55
17. An electric dust collecting unit characterized by comprising:
- a corona discharging portion (8) for giving rise to corona discharge to charge floating particulates in an airflow; and
- an electric collecting portion (9) disposed on a leeward side of said corona discharging portion (8), for electrically collecting said floating particulates charged by said corona discharging portion (8), wherein:
- said corona discharging portion (8) comprises a plurality of needle electrodes (8a) which each has a sharp needle tip (81) and also which is disposed in such a way that said sharp needle tip (81) thereof may be directed toward a leeward side, a plurality of rod-shaped or elongated supporting electrodes (8b) separately disposed from each other with a predetermined spacing therebetween, for supporting and fixing said plurality of said needle electrodes (8a), and a plurality of cell-shaped opposing electrodes (8c, 8f) which is disposed on a leeward side of said plurality of rod-shaped or elongated supporting electrodes (8b) in a one-to-one opposing relationship with said needle electrodes (8a) and also which each has both ends thereof opened for forming airflow passage;
- said electric collecting portion (9) comprises a plate-shaped collecting electrode (9a) for electrostatically attracting and collecting said floating particulates charged by said needle electrodes (8a) and a plate-shaped deflecting electrode (9b) provided correspondingly to said plate-shaped collecting electrode (9a), for giving said floating particulates which are charged, deflecting force toward said plate-shaped collecting electrode (9a), in such a configuration that said plate-shaped collecting electrode (9a) and said plate-shaped deflecting electrode (9b) are alternately disposed in parallel with each other with a predetermined spacing therebetween; and
- a mounting spacing between said plate-shaped collecting electrode (9a) and said plate-shaped deflecting electrode (9b) is set shorter than a

mounting spacing between said plurality of rod-shaped or elongated supporting electrodes (8b).

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

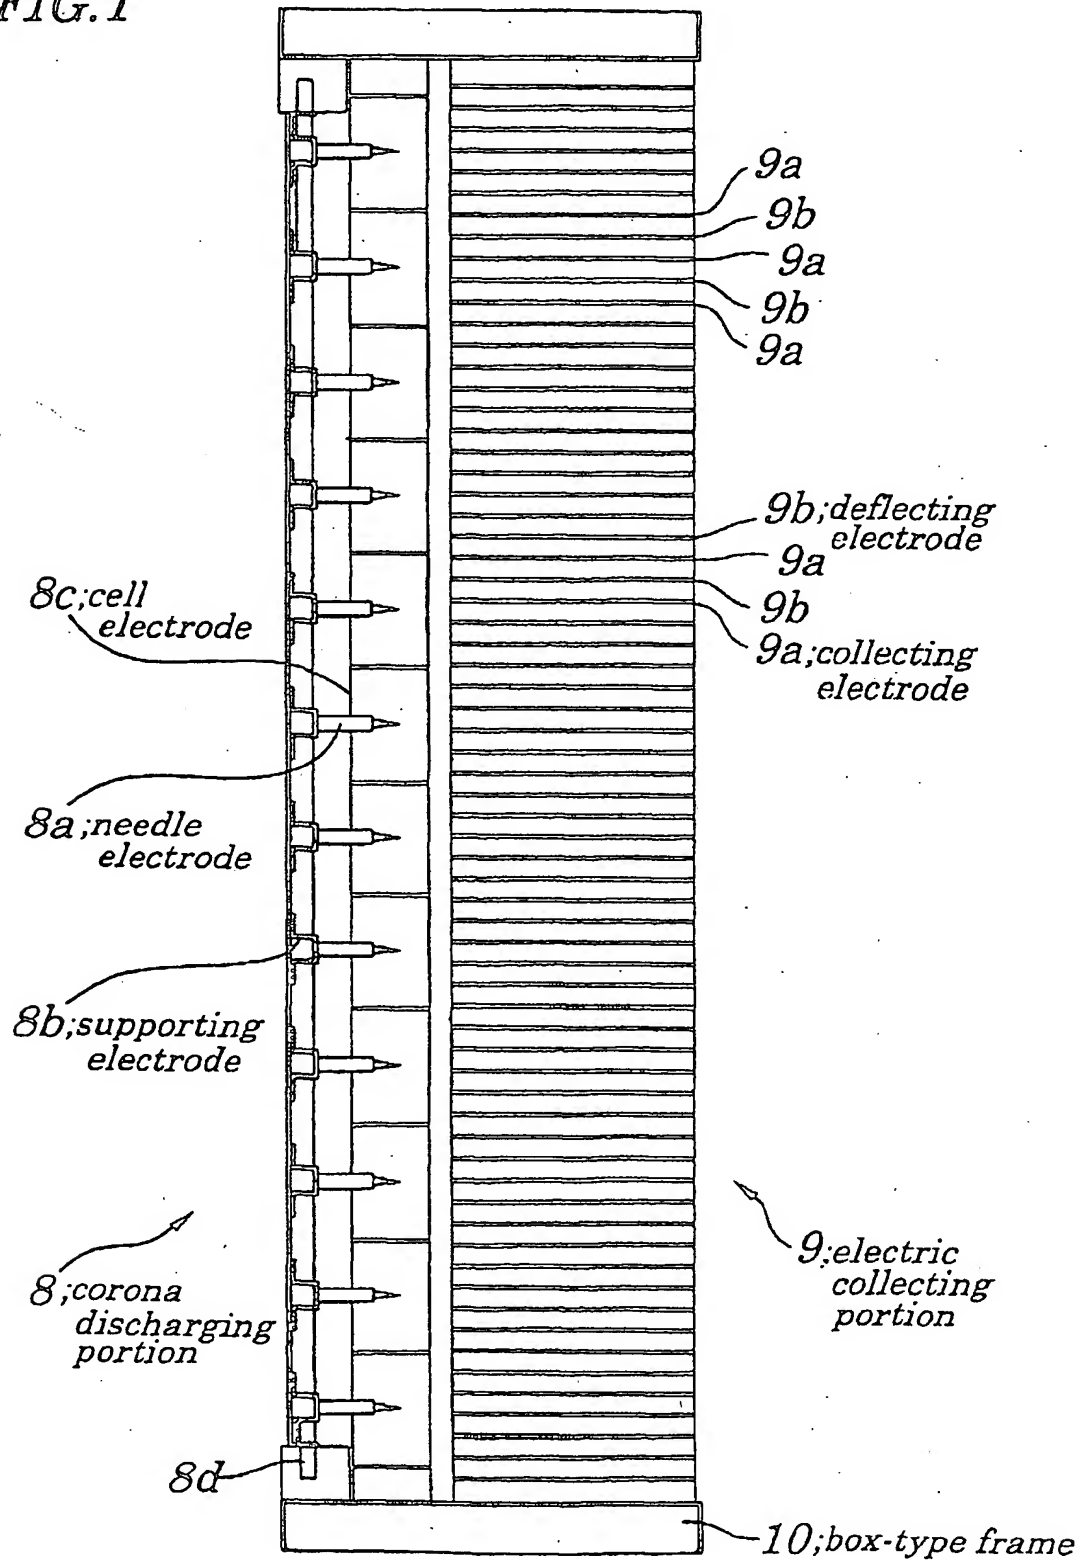


FIG.2

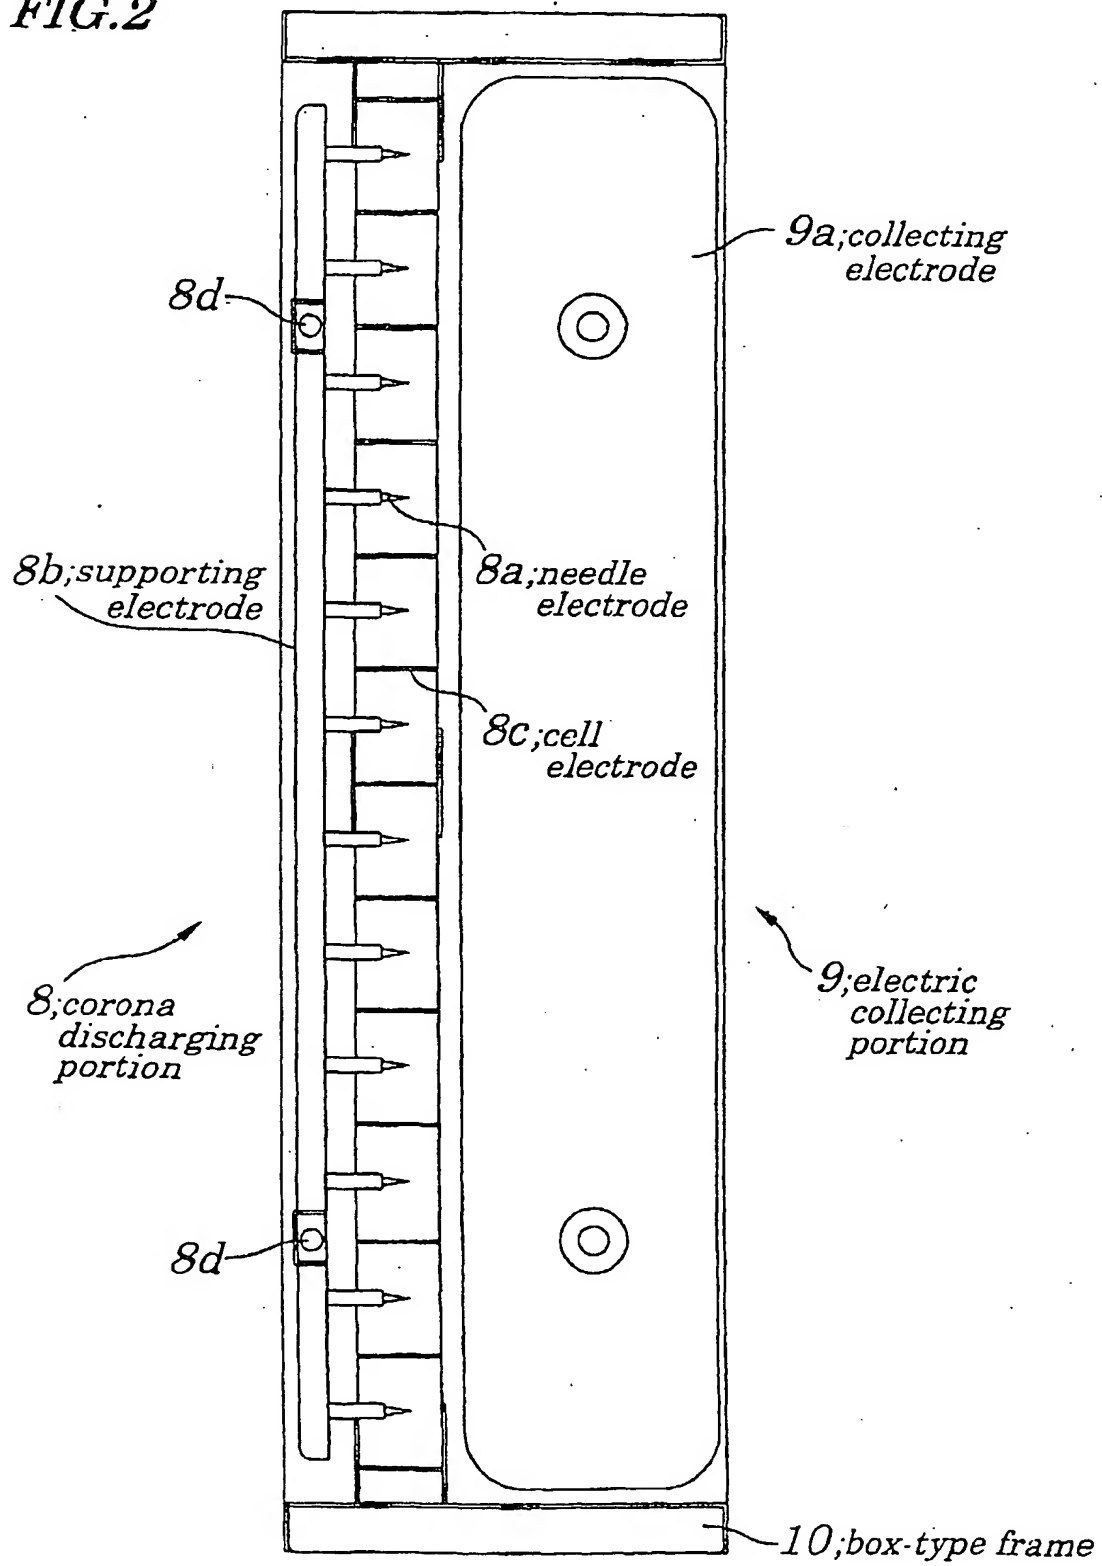


FIG. 3

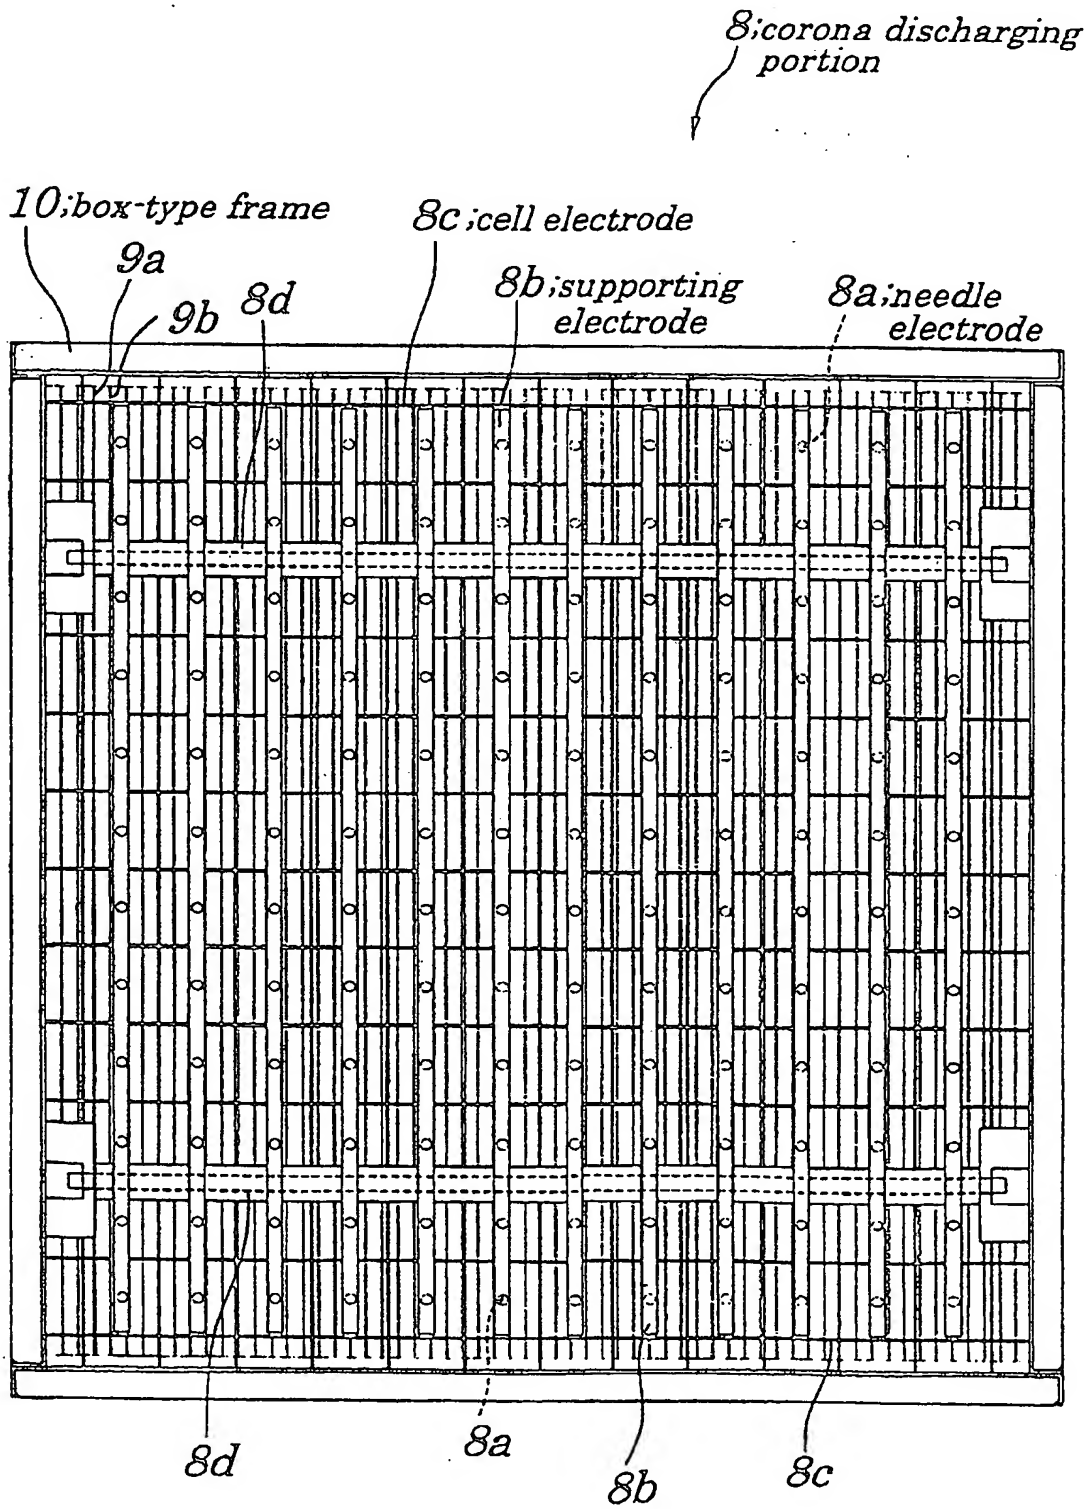
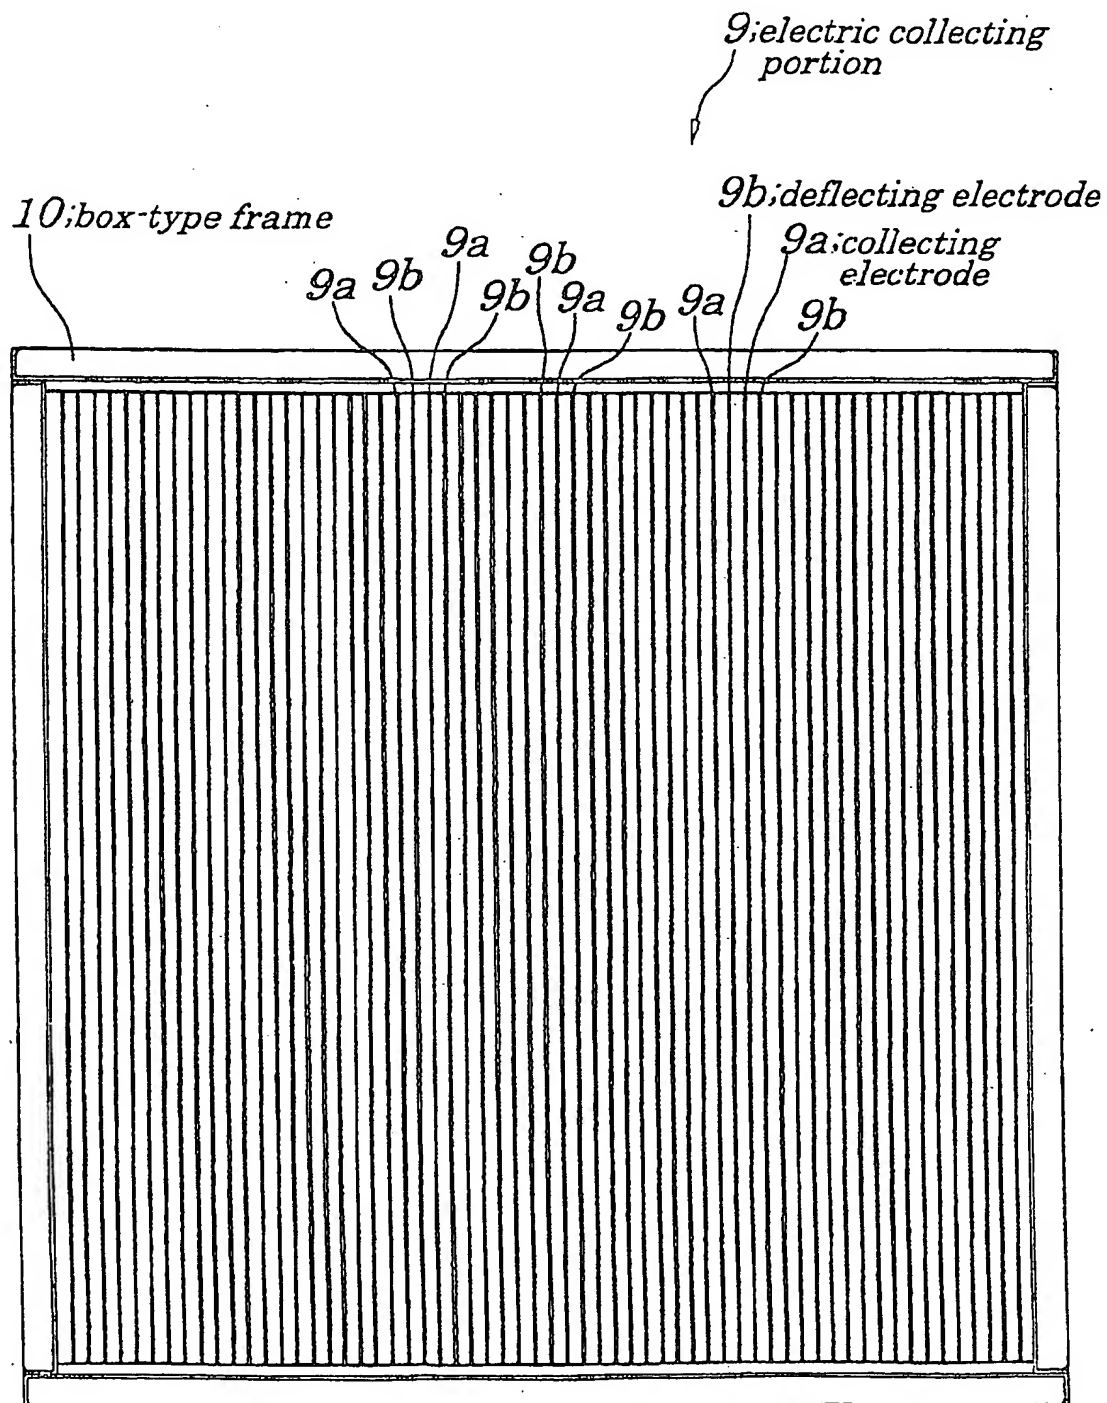


FIG. 4



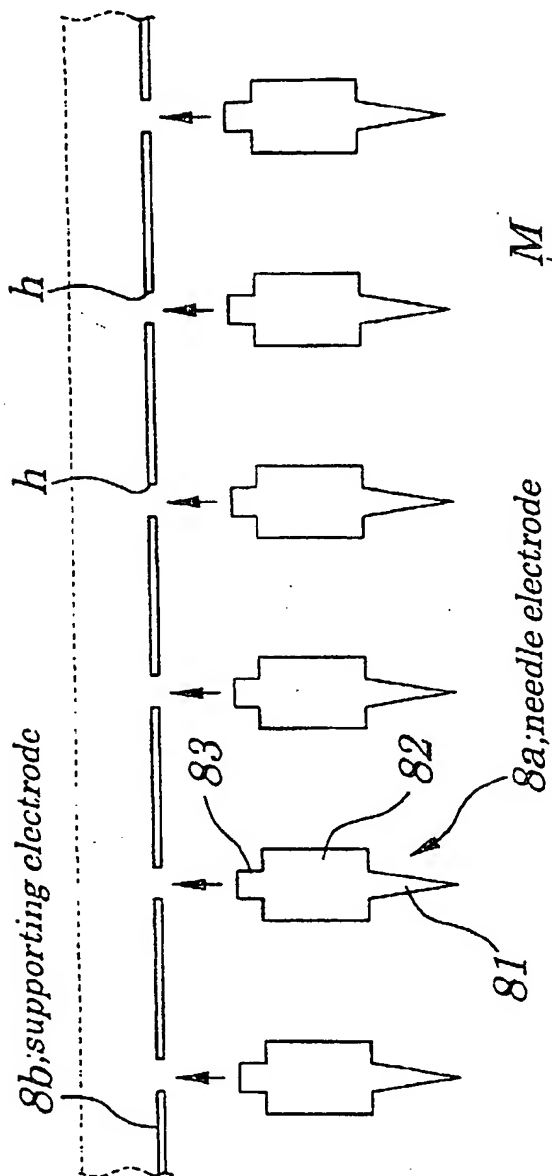


FIG. 5A

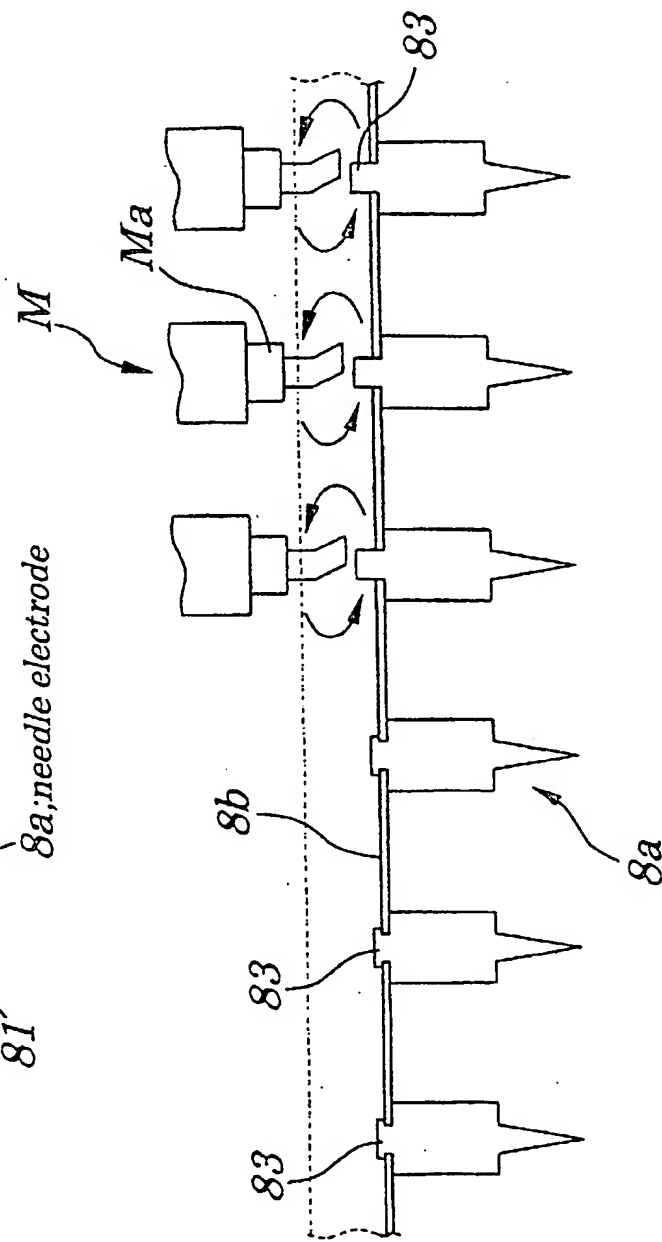


FIG. 5B

FIG. 6

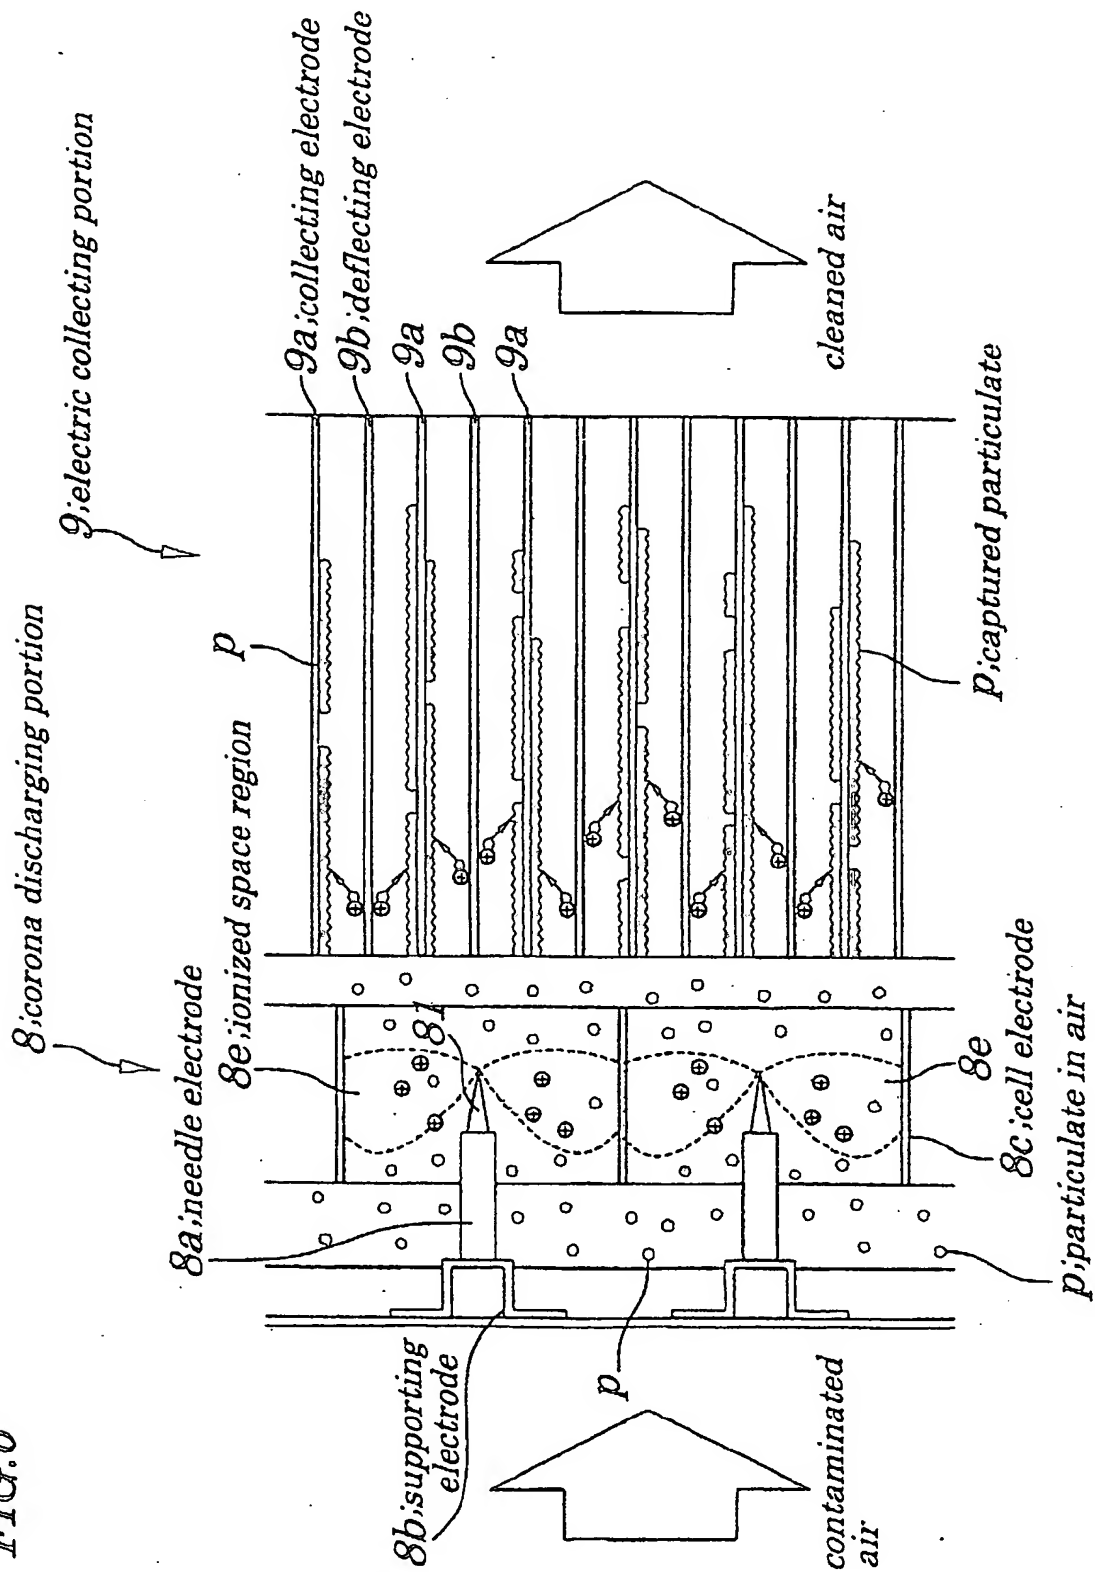


FIG. 7

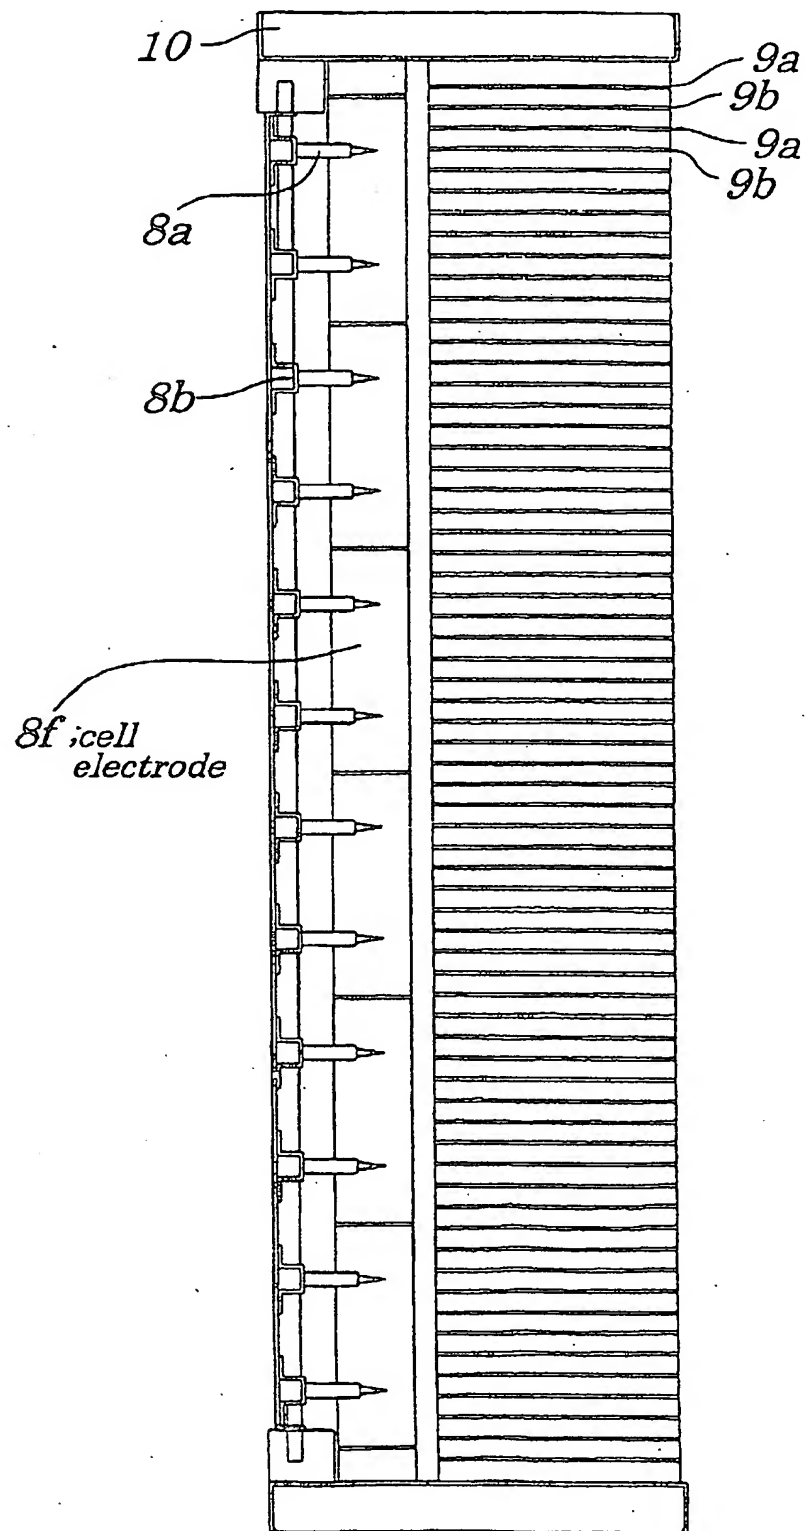


FIG.8 (PRIOR ART)

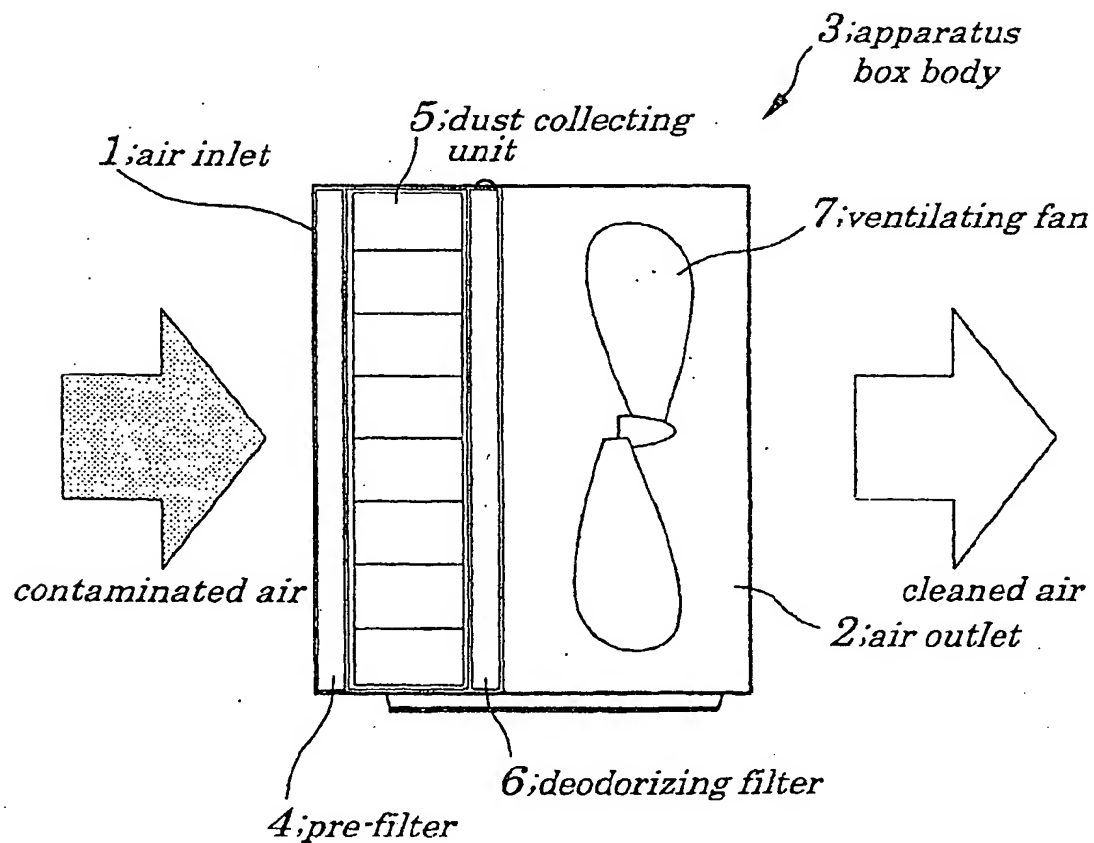


FIG. 9 (PRIOR ART)

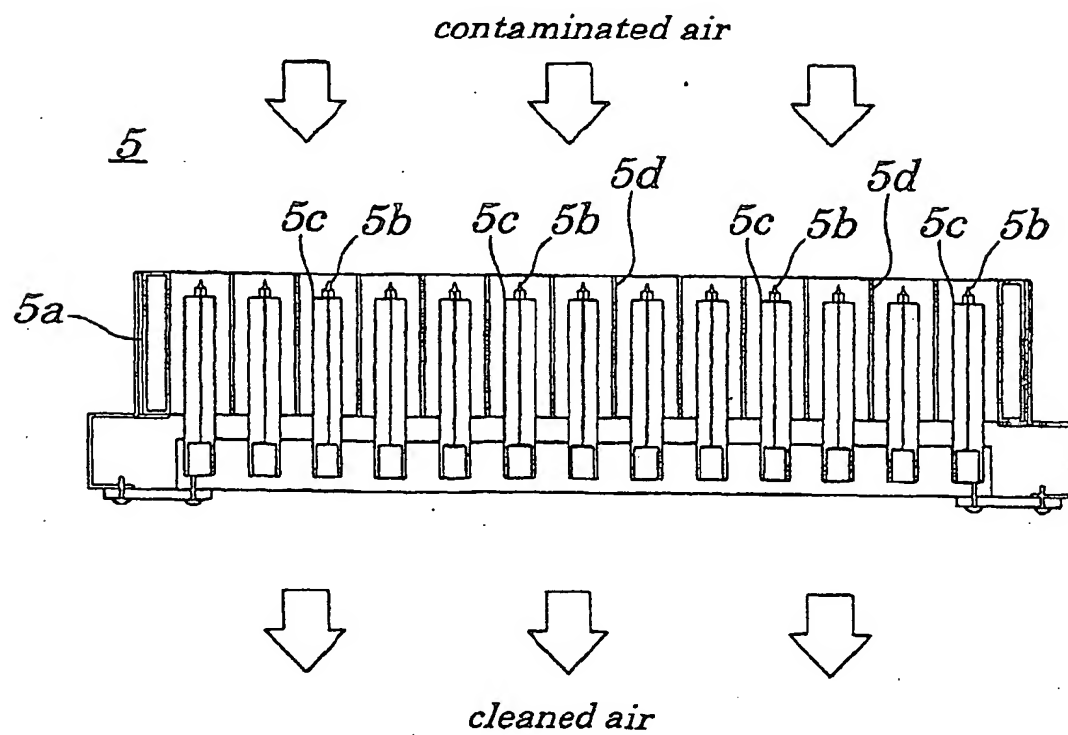


FIG. 10 (PRIOR ART)

5 ; box-shaped electric
dust collecting unit



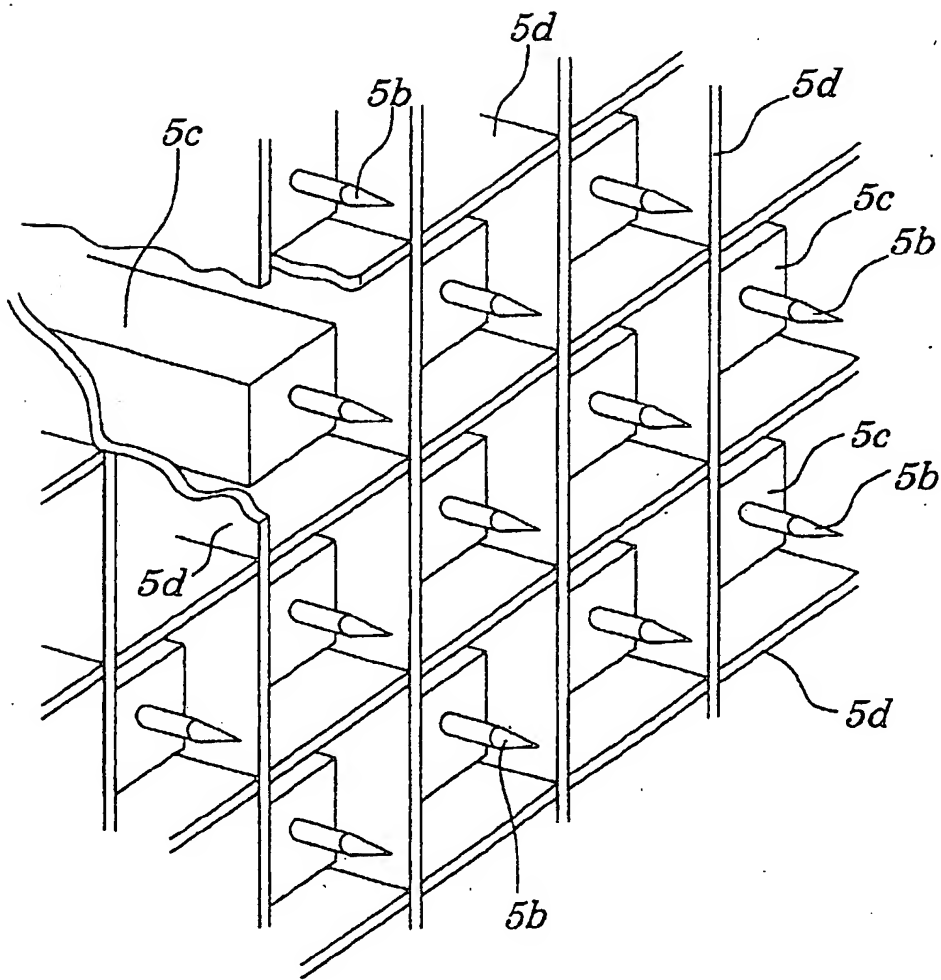


FIG. 11 (PRIOR ART)

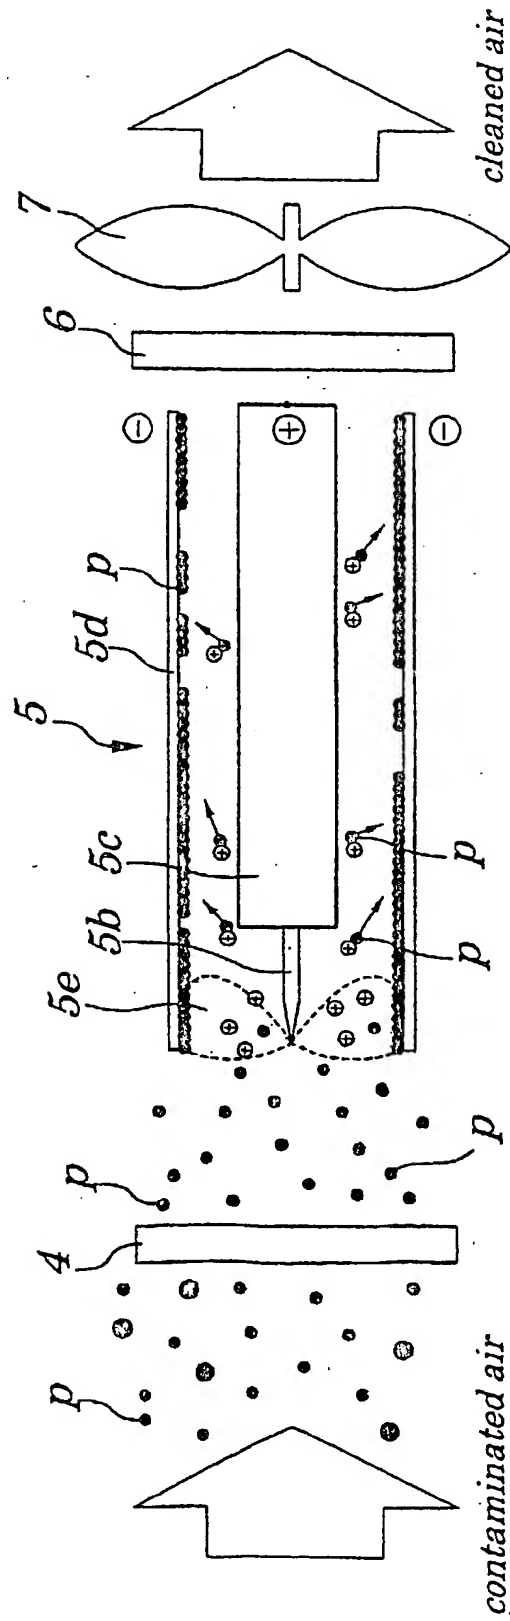



(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 101 533 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
13.03.2002 Bulletin 2002/11

(51) Int Cl.7: B03C 3/12, B03C 3/41

(43) Date of publication A2:
23.05.2001 Bulletin 2001/21

(21) Application number: 00124900.2

(22) Date of filing: 15.11.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Endo, Kiyomu
Tokyo (JP)

(74) Representative: Ghioni, Carlo Raoul Maria et al
c/o BUGNION S.p.A.
Viale Lancetti 17
20158 Milano (IT)


(30) Priority 15.11.1999 JP 32471799

(71) Applicant O-DEN Corporation
Tokyo (JP)

(54) Electrostatic dust precipitator

(57) An electric dust collecting unit disclosed herein includes a corona discharging portion (8) for giving rise to corona discharge to electrically charge cigarette smoke particulates, toner, and other floating particulates in air, an electric collecting portion (9) disposed on a leeward side of this corona discharging portion (8), for electrically collecting the floating particulates charged at the corona discharging portion (8), and a box-type frame (10) with its opposite surfaces opened, in such a configuration that the corona discharging portion (8) has a plurality of needle electrodes (8a) which is disposed in such a way that their respective needle tips may be directed toward the leeward side (that is, with their backs directed toward a front face opening in the box-type frame (10)).

FIG. 1

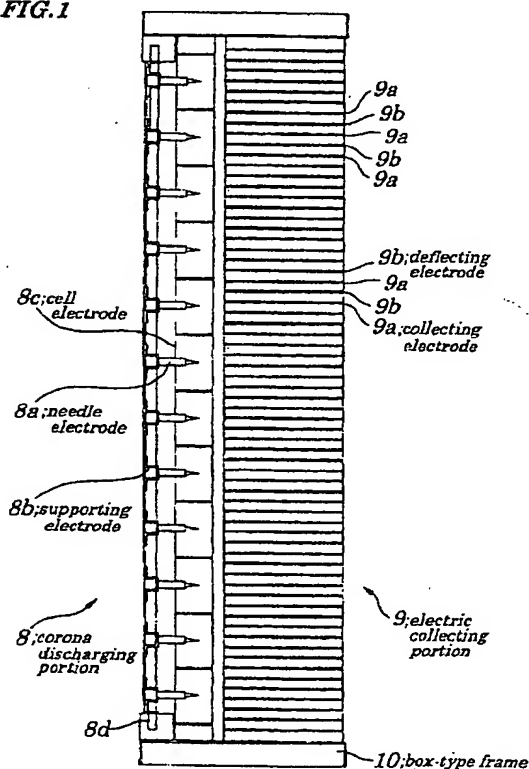

EP 1 101 533 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 12 4900

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	GB 2 154 156 A (NIPPON LIGHT METAL CO) 4 September 1985 (1985-09-04) * page 1, line 102 - page 2, line 106; claims 1,10,16; figures 6,7,9-12 *	1-5,7-16	B03C3/12 B03C3/41
A	FR 883 953 A (HEINRICH KOPPERS GES M B H) 28 July 1943 (1943-07-28) * the whole document *	1	
D,A	EP 0 803 289 A (KABUSHIKI KAISYA O DEN) 29 October 1997 (1997-10-29) * claims 1,2 *	1,6	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B03C
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 15 January 2002	Examiner Decanniere, L
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.92 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 12 4900

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-01-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2154156	A	04-09-1985	DE 3502148 A1	01-08-1985
			FR 2561136 A1	20-09-1985
			KR 8802676 B1	20-12-1988
			US 4602921 A	29-07-1986
FR 883953	A	28-07-1943	NONE	
EP 0803289	A	29-10-1997	JP 2733908 B2	30-03-1998
			JP 9285739 A	04-11-1997
			CA 2203333 A1	23-10-1997
			CN 1174099 A	25-02-1998
			DE 69703462 D1	14-12-2000
			DE 69703462 T2	28-06-2001
			EP 0803289 A1	29-10-1997
			KR 241082 B1	01-02-2000
			SG 71024 A1	21-03-2000
			US 5928592 A	27-07-1999
			US 5925170 A	20-07-1999

EPO FORM P0452

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82